

# 8X8 - 15 FT STAND INSULATED BLIND




SCAN FOR  
INSTRUCTIONS

800-763-7320  
RANCHKINGBLINDS.COM

## KIT BAG CONTENTS

- 36 - 1¼" x ½" BOLTS
- 44 - ½" LOCK NUTS
- 18 - 1" x ⅜" BOLTS
- 2 - 2½" x ⅜" BOLTS
- 20 - ⅜" LOCK NUTS
- 4 - ⅜" WASHERS
- 22 - ¾" SELF-TAPPING SCREWS
- 4 - ¼ X 1" SELF-TAPPING SCREWS
- 4 - LADDER END CAPS

## 8X8 - 15 FT STAND INSULATED BLIND

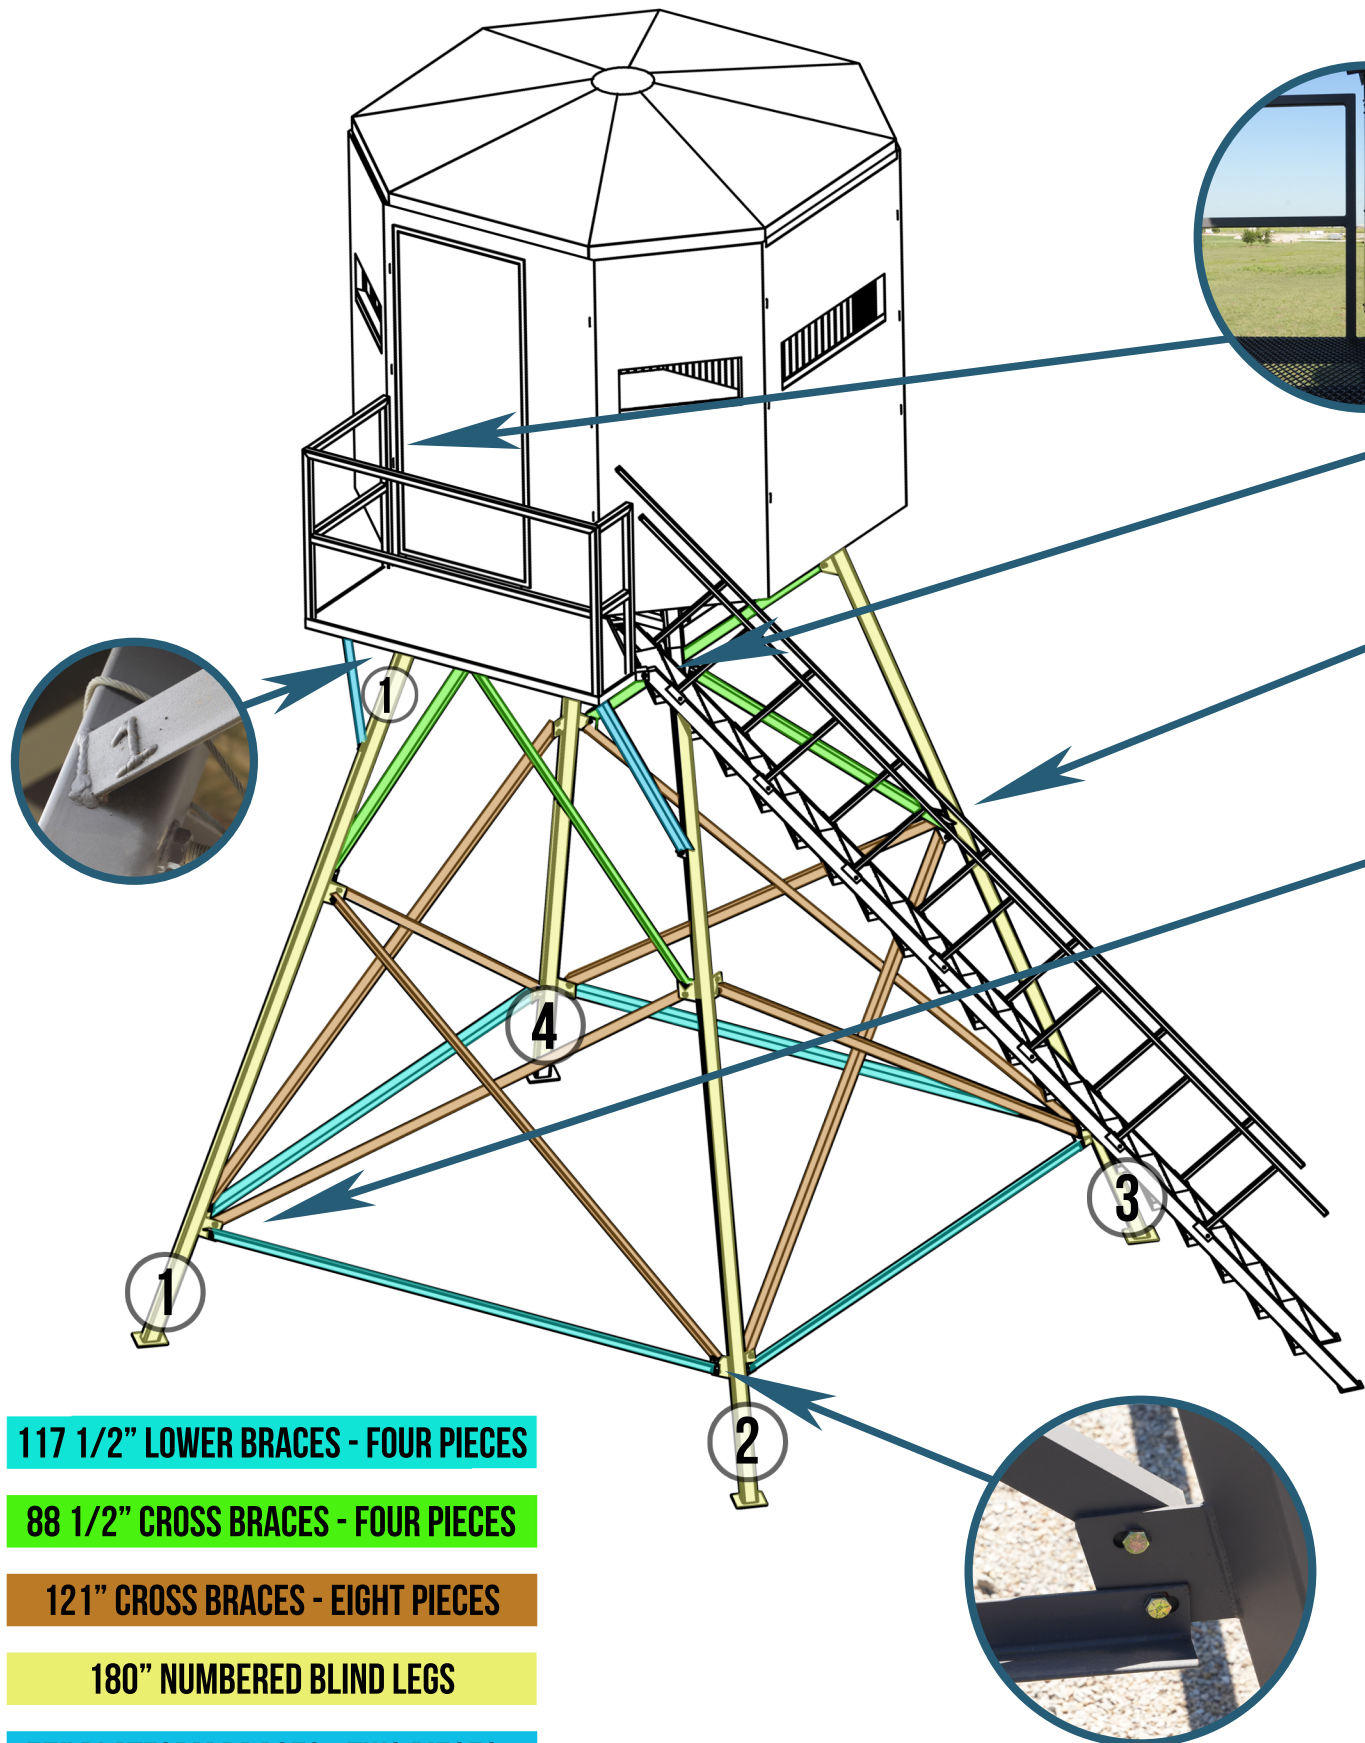

117 1/2" LOWER BRACES - FOUR PIECES

88 1/2" CROSS BRACES - FOUR PIECES

121" CROSS BRACES - EIGHT PIECES

180" NUMBERED BLIND LEGS

57" PLATFORM BRACES - TWO PIECES

○ LEGS ARE MARKED AND INSTALLED WITH THE LEG NUMBER ON THE LEG AND BASE

- Raise blind and slide in legs, make sure legs are in all the way, tighten T-Handle
- Lower to 2" off the ground
- Install all braces, leave 1 1/4 bolts and lock nuts loose at this time
- Set blind on a level surface, pull out all legs to settle the blind into it's final position
- Tighten all bolts
- Install 1/4" x 1" self-tapping screws into each X cross-over of the 121" cross braces
- Raise platform and install five 3/8" bolts, level platform by setting equal gap between vertical railing and the blind.
- Install 57" braces from Leg One and Leg Two to platform using 3/8 bolts and lock nuts
- Attached ladder to platform using 2 1/2" x 3/8 bolts. Be sure to install bolt threads towards the outside, then keeps bolts from creating a tripping hazard.
- Install left and right ladder hand rails with 3/4" self-tapping screws
- Push in plastic ladder end caps on each end of the ladder rails